

MODEL 122 Control Panel

Single phase, duplex alternating pump control with override.

The Model 122 control panel is designed to alternately control two 120, 208, or 240 VAC single phase pumps in water and sewage installations. The alternating action equalizes pump wear. In addition to the alternating pump control, this system provides override control should either pump fail. If an alarm condition occurs, an alarm switch activates the audio/visual alarm system. Common applications include pump chambers, sump pump basins, irrigation systems and lift stations.

PANEL COMPONENTS


1. **Enclosure** measures 10 X 10 X 6 inches (25.4 X 25.4 X 15.24 cm). Choice of NEMA 1 (steel for indoor use), or NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for outdoor or indoor use). **Note:** Options selected may increase enclosure size and change component layout.
2. **Magnetic Motor Contactors** control pumps by switching electrical lines.
3. **HOA Switches** for manual pump control (mounted on circuit board).
4. **Control Circuit Board** provides pump control and alternation.
5. **Green pump Run Indicator Lights** (mounted on circuit board).
6. **Circuit Breakers** (optional) provide pump disconnect and branch circuit protection.
7. **Ground Lugs**
8. **Float Status Indicator Lights** (mounted on circuit board).
9. **Control and Alarm Power Indicator Lights** (mounted on circuit board)
10. **Auxiliary Alarm Contact**, form C (mounted on circuit board).

NOTE: Schematic is located inside the panel on enclosure cover.

STANDARD ALARM PACKAGE

11. **Red Alarm Beacon** provides 360° visual check of alarm condition. **Note:** NEMA 1 style utilizes a door mounted indicator in lieu of a beacon.
12. **Alarm Horn** provides audio warning of alarm condition (83 to 85 decibel rating). **Note:** NEMA 1 style utilizes an internally mounted buzzer in lieu of horn.
13. **Exterior Alarm Test/Normal/Silence Switch** allows horn and light to be tested and horn to be silenced in an alarm condition. Alarm automatically resets once alarm condition is cleared.
14. **Horn Silence Relay** (mounted on circuit board).

NOTE: other options available.

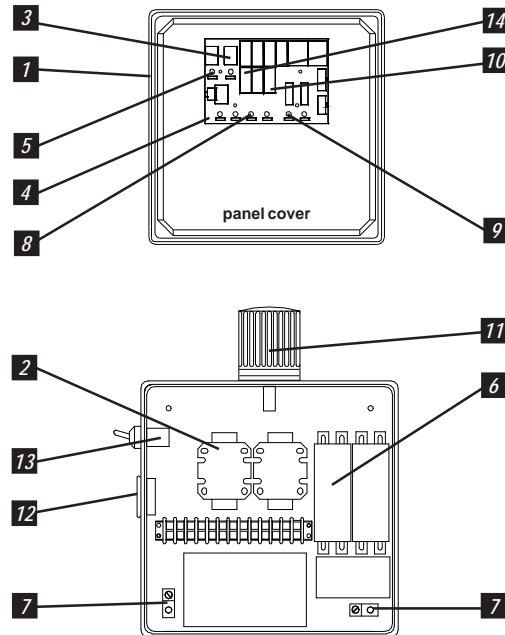

Model Shown 1221W114X6A



FEATURES

- Entire control system (panel and switches) is UL Listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes three 20' SJE SignalMaster® control switches
- Complete with step-by-step installation instructions
- Three-year limited warranty

SEE BACKSIDE FOR COMPLETE LISTING OF AVAILABLE OPTIONS.
SEE PRICE BOOK FOR LIST PRICE.

SJE
Rhombus

PO Box 1708, Detroit Lakes, MN 56502

1-888-DIAL-SJE • 1-218-847-1317

1-218-847-4617 Fax

email: sje@sjerhombus.com

www.sjerhombus.com

122								6A
MODEL 122								
ALARMPACKAGE								
<input type="checkbox"/>	0 = select options or no alarm package							
<input type="checkbox"/>	1 = alarm package (includes test/normal/silence switch, fuse, red light, & horn)							
ENCLOSURERATING								
<input type="checkbox"/>	I = Indoor, NEMA 1 (metal)							
<input type="checkbox"/>	W = Weatherproof, NEMA 4X (engineered thermoplastic)							
STARTING DEVICE								
<input type="checkbox"/>	1 = magnetic motor contactor 120/208/240V							
<input type="checkbox"/>	9 = magnetic motor contactor 120V only							
PUMP FULL LOAD AMPS								
<input type="checkbox"/>	0 = 0-7 FLA							
<input type="checkbox"/>	1 = 7-15 FLA							
<input type="checkbox"/>	2 = 15-20 FLA							
<input type="checkbox"/>	3 = 20-30 FLA							
PUMP DISCONNECTS								
<input type="checkbox"/>	0 = no pump disconnect							
<input type="checkbox"/>	4 = circuit breaker 120V (select STARTING DEVICE option 9 above) 120/208/240V (select STARTING DEVICE option 1 above)							
FLOAT SWITCH APPLICATION								
<input type="checkbox"/>	H or L = pump down or pump up (select 17 option)							
<input type="checkbox"/>	X = no floats							
OPTIONS <i>Listed below</i>								

★ ENCLOSURE UPSIZE
If you selected one or more of the ★ options, or two ★★ options, add a one-time enclosure upsize fee would apply.

- | | |
|--|--|
| <p>CODE DESCRIPTION</p> <p><input type="checkbox"/> 1A Red beacon only / no audio
<i>(must select "0" for alarm package)</i></p> <p><input type="checkbox"/> 1C Horn only / no visual
<i>(must select "0" for alarm package)</i></p> <p><input type="checkbox"/> ★★3A Alarm flasher</p> <p><input type="checkbox"/> ★ 3B Manual alarm reset</p> <p><input type="checkbox"/> ★ 4A Redundant off
<i>(select Option 4D if floats included)</i></p> <p><input type="checkbox"/> 4B Red redundant off indicator & alarm
<i>(must select Option 4A also)</i></p> <p><input type="checkbox"/> 4D Redundant off float
<i>(must select 4A option) (select 17 option)</i></p> <p><input type="checkbox"/> ★ 5A Thermal cutout/heat sensor auto reset
<i>(for pumps w/thermal switch leads)</i></p> <p><input type="checkbox"/> ★ 5E Seal failure circuit & red indicator (2 wire)</p> <p><input checked="" type="checkbox"/> 6A Auxiliary alarm contact, form C
<i>(included as standard)</i></p> <p><input type="checkbox"/> ★ 8A Elapsed time meter</p> <p><input type="checkbox"/> ★ 8C Event (cycle) counter</p> <p><input type="checkbox"/> ★ 9_A Pump overload
specify amperage after number 9 followed by letter "A".
Example: 912A = 12 amp pump.</p> <p>★ <input type="checkbox"/> 0-25 FLA</p> <p>★ <input type="checkbox"/> 25-30 FLA</p> <p><input type="checkbox"/> 10E Lockable latch - NEMA 2X</p> <p><input type="checkbox"/> 10E Lockable latch - NEMA 1</p> <p><input type="checkbox"/> ★ 10F Lightning arrestor <i>(select pump circuit breaker)</i></p> | <p>CODE DESCRIPTION</p> <p><input type="checkbox"/> ★★10K Anti-condensation heater</p> <p><input type="checkbox"/> 11C NEMA 1 alarm panel</p> <p><input type="checkbox"/> 11D NEMA 4X alarm panel</p> <p><input type="checkbox"/> ★ 14B Main disconnect <i>(rotary style, mounted through door, non-fused)</i>
<i>(must select circuit breaker)</i></p> <p>★ <input type="checkbox"/> 0-20 FLA (total of both pumps)</p> <p>★ <input type="checkbox"/> 20-60 FLA (total of both pumps)</p> <p><input type="checkbox"/> 16A 10' cord in lieu of 20' <i>(per float)</i></p> <p><input type="checkbox"/> 16B 15' cord in lieu of 20' <i>(per float)</i></p> <p><input type="checkbox"/> 16C 30' cord in lieu of 20' <i>(per float)</i></p> <p><input type="checkbox"/> 16D 40' cord in lieu of 20' <i>(per float)</i></p> <p><input type="checkbox"/> 17A SJE SignalMaster® / pipe clamp ● <i>(per float)</i></p> <p><input type="checkbox"/> 17B SJE SignalMaster® / externally weighted ● <i>(per float)</i></p> <p><input type="checkbox"/> 17C Sensor Float® / internally weighted ▲ <i>(per float)</i></p> <p><input type="checkbox"/> 17D Sensor Float® / externally weighted ▲ <i>(per float)</i></p> <p><input type="checkbox"/> 17E Sensor Float® Mini / pipe clamp ▲ <i>(per float)</i></p> <p><input type="checkbox"/> 17F Sensor Float® Mini / externally weighted ▲ <i>(per float)</i></p> <p><input type="checkbox"/> 17J Sensor Float® / pipe clamp ▲ <i>(per float)</i></p> <p><input type="checkbox"/> 19B Lead lag selector switch</p> <p><input type="checkbox"/> 19F Fourth float to separate alarm function from lag</p> <p><input type="checkbox"/> 19T TOA (Test/Off/Automatic) switches and pump run lights through door mounted</p> <p><input type="checkbox"/> 19U HOA (Hand/Off/Automatic) switches and pump run lights through door mounted</p> <p><input type="checkbox"/> 19X Door mounted pump run indicator</p> <p style="text-align: center;">● Mechanically-activated ▲ Mercury-activated</p> |
|--|--|

If additional features are required, call the factory for a quote on an Engineered Custom control panel.

SAMPLE

MODEL	122	1	W	9	0	4	H	6A 8AC 17A
Alarm Package	_____							
Enclosure Rating	_____							
Starting Device	_____							
Pump Full Load Amps	_____							
Pump Disconnect	_____							
Float Switch Application	_____							
Options: Auxiliary alarm contact, form C,	_____							
Elapsed time meter, event (cycle) counter,	_____							
SJE SignalMaster® / pipe clamp	_____							