

PLAN VIEW

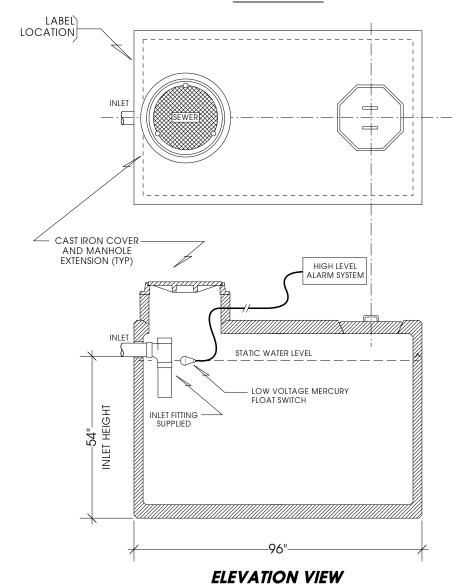

NOTE

- 1. CONCRETE OF PORTLAND CEMENT DESIGN POURED AND VIBRATED TO DEVELOP MINIMUM 4000 P.S.I. AT 28 DAYS AND REINFORCED WITH #3 DEFORMED STEEL BARS AS PER STRUCTURAL SPECIFICATIONS. STRUCTURAL DRAWINGS AVAILABLE UPON REQUEST.
- 2. 1000 GALLON HOLDING TANKS ARE AVAILABLE IN BOTH STANDARD AND TRAFFIC RATED MODELS
- EXCAVATION MUST BE TWO FOOT LARGER THAN UNIT SIZE
- 4. EXCAVATED BASE MUST BE LEVEL AND COMPACT. SIX INCHES OF GRAVEL OR ROADBASE RECOMMENDED
- 5. HIGH LEVEL ALARM SYSTEM, IF REQUIRED, BY PYRAMID OR OTHERS

EXCAVATION SIZE: 9 FOOT LONG BY SIX WIDE MINIMUM ALLOW 18 INCHES OF EARTH COVER ABOVE TOP OF TANK TO GRADE



LABEL:

YRAMID
RECAST
INC

THIS UNIT CONFORMS
TO MUNICIPAL
UNIFORM PLUMBING
CODES AND ASTM
C-27 REQUIREMENTS

LOCATED ON INLET END UPPER LEFT HAND CORNER

ALL PRODUCTS CONFORM TO ASTM STANDARDS AND ARE LOS ANGELES TESTING LABORATORY

LISTED & APPROVED

1000-HT 1000 Gallon Capacity Holding Tank



- * INDUSTRIAL WASTE CLARIFIERS
- * SAND AND GREASE INTERCEPTORS
- * SEPTIC TANKS & DISTRIBUTION BOXES

2438 LOCUST AVE. RIALTO, CA PH. (909) 823-4255 FAX (909) 823-8687

DRAWING # PHT030003A

DRAWN BY SCOTT BENART

SCALE

1:32