
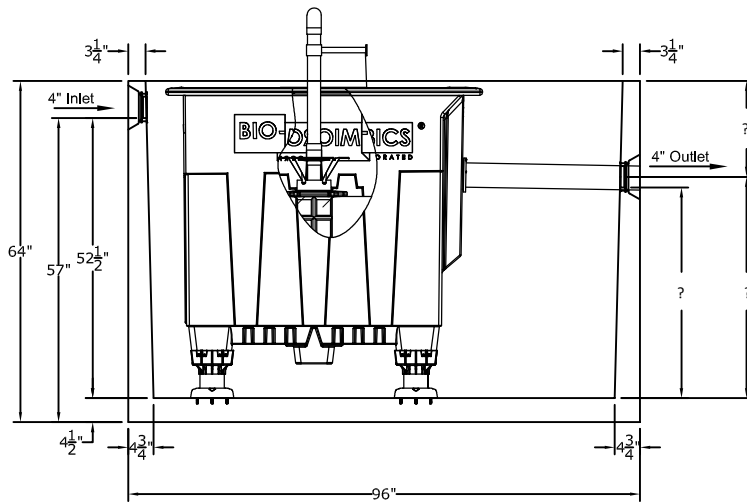




PLAN VIEW

**SEPTIC TANKS SPECIFICATIONS:**

1. Material Specifications:
  - A. Concrete: Portland Cement ASTM C 150 and Federal Specification on Cement, SS-C 1960/3, Type II/V Low Alkali. Minimum Compressive Strength 5,000 PSI at 28 days.
  - B. Reinforcing Bars: ASTM A-706 / A-615, Grade 40 and 60.
2. All dimensions + or -, not to be used for construction purposes unless certified.
3. Standard ground water seal-butyl mastic, cement mortar, epoxy, or polyurethane.
4. Inlet and Outlet fittings installed in tank walls using "Polylok Pipe Seal". Low pressure pipe seals for precast tanks.
5. Tank to be placed on natural / native soil or approved compact fill.

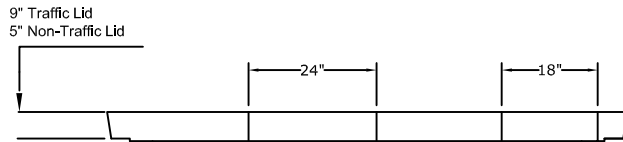

LONGITUDINAL SECTION

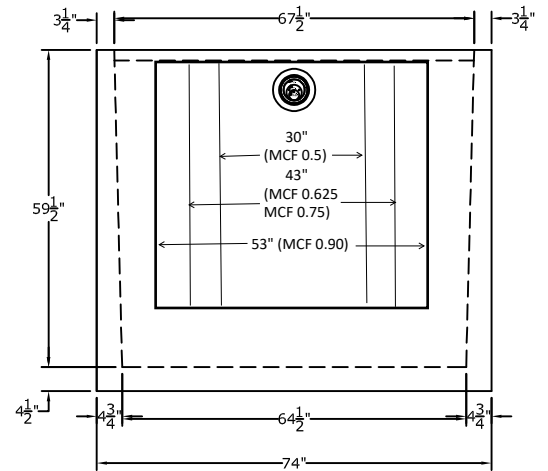

END ELEVATION

WEIGHT:  
 TRAFFIC: 16,820 lbs.  
 NON TRAFFIC: 13,760 lbs.



1625 E. DONOVAN RD., STE. C  
 SANTA MARIA, CA 93454  
 PH: (805) 928-2855  
 FAX: (805) 928-2114  
 www.midstateconcrete.com

**1,200 GAL.**  
**Primary Settling Tank**  
 MicroFast 0.5, 0.625, 0.75, 0.90